




12'x60' Skidded Rec. Unit

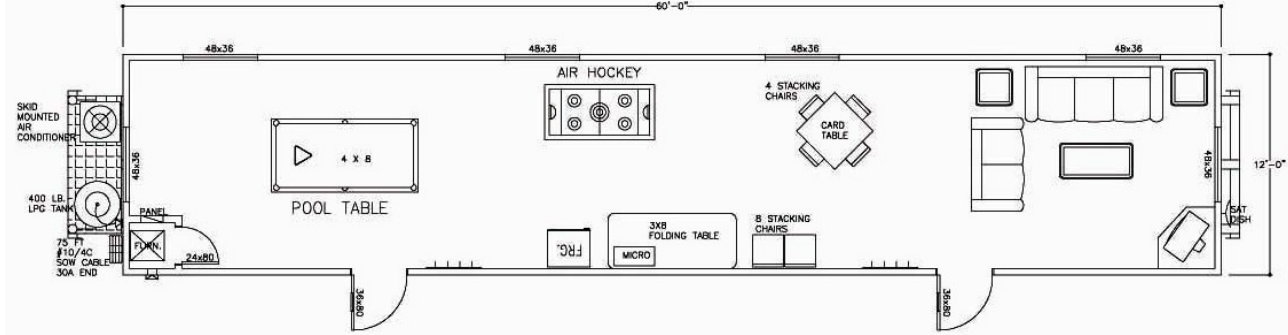

SPECIFICATIONS

- Mounted on triple skid with 6" draw bar
- 45mil EPDM rubber roofing over 5/8" T & G Select plywood
- 1- 400 lb Propane tank plumbed into a dual stage regulator for the unit and a second stage piped into gas line for various applications
- Split tin 28 gauge exterior siding
- 75' #10/4c SOOW cable c/w 30 amp cord end
- Intertherm 56,000 BTU sealed combustion furnace
- Intertherm 2.5 ton A/C unit mounted on a metal frame then to the skid
- McLeod white, double glazed, vinyl slider windows c/w screens
- White horizontal window blinds
- McLeod exterior doors
- 45 Min. rated furnace room door
- All doors have steel knock down expandable frames
- All exterior doors come with flat bar panic hardware and Doorex closures
- Type X drywall used on ceiling and furnace room
- 1/4" Drywall over 3/8" plywood for the walls
- 24 cct. 120/208 Volt, 100 amp, single phase electrical panel-push in type breakers
- 6 Telephone drops for future service, cabled for T.V and comes with 2-5lb. ABC fire extinguishers





12'x60' Skidded Rec. Unit



